



BUILDING TRUST



Wabo®Contour II

Interior Wall and Ceiling Expansion Joint System

Features	Benefits
<ul style="list-style-type: none"> • No Visible Hardware 	Utilizes hidden hardware. Available for wall and ceiling applications, creates an attractive corridor wrap.
<ul style="list-style-type: none"> • Unique Fastening System 	Installation time is significantly reduced by using unique snap lock fastening system.
<ul style="list-style-type: none"> • Flush Finish 	The flush installed finish minimizes the visual impact of the expansion joint cover creating an expansion joint that blends in with the desired aesthetic.



RECOMMENDED FOR:

- All interior wall, ceiling, and soffit expansion joint applications.
- For use in various construction projects including:
 - Health-Care
 - Transportation
 - Recreation
 - Retail
 - Commercial
 - Educational
 - Parking Garage (interior areas)

DESCRIPTION:

Wabo®Contour II is a durable wall and ceiling expansion control system capable of accommodating multi-directional thermal and seismic movements. The aesthetically attractive system is engineered to minimize visible hardware and provides a flush finish with adjacent wall and ceiling surfaces when installed in standard 5/8-inch gypsum wallboard construction. Wabo®Contour II may also be surface mounted directly to the wall or ceiling surfaces.

PACKAGING:

- Aluminum Profiles: bundled and palletized in Standard 10-foot lengths.
- Accessories: All other materials packaged in manufacturer's standard labeled carton.




BUILDING TRUST



TECHNICAL DATA:

Model CTR

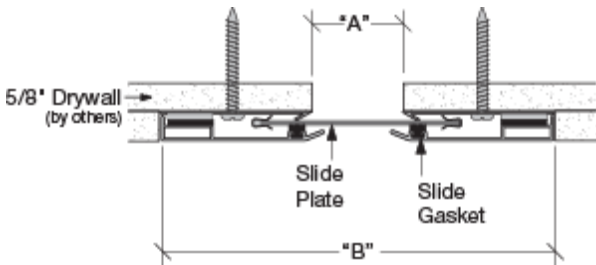

Note: see product sales drawings for additional details

Movement Table

MODEL NUMBER	JOINT OPENING "A"		SYSTEM WIDTH "B"		TOTAL MOVEMENT	
	inches	mm	inches	mm	inches	mm
CTR-100	1.0	25	7.63	194	4.0	102
CTR-200	2.0	51	8.63	219	4.0	102
CTR-300	3.0	76	9.63	244	4.0	102
CTR-400	4.0	102	13.63	346	7.0	178
CTR-500	5.0	127	14.63	371	7.0	178
CTR-600	6.0	152	15.63	397	7.0	178
CTR-100C	1.0	25	5.50	140	3.0	76
CTR-200C	2.0	51	6.25	159	3.0	76
CTR-300C	3.0	76	7.25	184	3.0	76
CTR-400C	4.0	102	9.75	248	4.5	114
CTR-500C	5.0	127	10.75	273	4.5	114
CTR-600C	6.0	152	11.75	298	4.5	114



PHYSICAL PROPERTIES:

Exposed Upper Component and Slide Plate:

Aluminum (standard) conforms to properties of ASTM B209 alloy 5005-H34 “guaranteed anodized quality” or ASTM B221 alloy 6063-T5 for extruded profiles. Thickness shall be .080”.

Slide Gasket:

Material shall be pre-cut medium density foam with R608D pressure sensitive adhesive on one side and a #900 series light weight, nylon fabric laminated to the other or polyvinylchloride extruded profile utilized with extruded profile.

Lower Edge Component:

Material shall be 18. Ga. Galvanized steel conforming to properties of ASTM A653.

Fastening System:

Upper and lower inter-lock fastening strips backed with pressure sensitive acrylic adhesive. Minimum shall be 1”.

APPLICATION:

INSTALLATION SUMMARY:

- Protect all expansion joint components from damage during installation and protect finished installation from damage from other trades during all work activities.
- Expansion joint systems shall be installed in accordance with manufacturer’s typical details and installation procedures.
- Wall or ceiling construction and materials shall be designed to allow for proper installation of system and its components. Construct any wall recess in accordance with manufacturer’s recommendations.

- Construct joint openings consistent in width and straight along joint height. Utilize double metal studs on both sides of the joint opening. Inspect and verify all substrates to be solid and sound prior to work.
- Construct all adjacent walls to be vertically flat along height and flush across both sides of the opening. Inspect and verify all substrates to be solid and sound prior to work.
- Install required gypsum wallboard inside joint opening at fire rated locations. Install appropriate fire barrier system, if required by building code and rated construction. Contact Emseal for recommendations on appropriate fire barrier system.
- Metal components shall be cut to length on job site where required. Components shall be miter cut in the field to conform to directional changes unless otherwise contracted with expansion joint manufacturer.
- All anchor holes shall be field drilled in accordance with manufacture’s drawings.

RELATED DOCUMENTS:

- Material Safety Data Sheets
- Wabo@Contour Specification
- Wabo@Contour Sales Drawings
- Wabo@Contour Installation Procedure



FOR BEST RESULTS:

- Do not install if the joint's anticipated movement will exceed the system's movement range.
- Deliver product in each manufacturer's original, intact, labeled containers. Protect the work area with appropriate plastic sheeting.
- Do not allow any of the components to freeze prior to installation. Store all components out of direct sunlight in a clean, dry location between 50°F (10°C) and 90°F (32°C). Store off the ground and protect from weather and construction activities.
- Do not use for external locations, which require watertight expansion joint systems. Contact Emseal for recommendations.
- Periodically inspect the applied material and repair localized areas as needed. Inspect for loose components and/or hardware, repair as necessary. Consult a Sika Emseal representative for additional information.
- Make certain the most current version of the product data sheet is being used. Please consult the website (www.emseal.com) or contact a customer service representative.
- Proper application is the responsibility of the user. Field visits by Sika Emseal personnel are for the purpose of making technical recommendations only and not for supervising or providing quality control on the jobsite.

LIMITED WARRANTY:

Sika Emseal warrants that this product conforms to its current applicable specifications. SIKA EMSEAL MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. The sole and exclusive remedy of Purchaser for any claim concerning this product, including, but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is the replacement of product or refund of the purchase price, at the sole option of Sika Emseal. Any claims concerning this product shall be submitted in writing within one year of the delivery date of this product to Purchaser and any claims not presented within that period are waived by Purchaser. IN NO EVENT SHALL SIKA EMSEAL BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDES LOSS OF PROFITS) OR PUNITIVE DAMAGES. Other warranties may be available when the product is installed by a factory trained installer. Contact your local Sika Emseal representative for details. The data expressed herein is true and accurate to the best of our knowledge at the time published; it is, however, subject to change without notice.

Sika Emseal
25 Bridle Lane, Westborough, MA 01581 USA
Phone: 508-836-0280 / Fax 508-836-0281
www.emseal.com

Rev. 1.1 07-24-2024



BUILDING TRUST

